


options:

| product code | trim colour | cct | beam angle | watts | driver |
|--------------|-------------|--------------|------------|-------|-------------------------|
| SM-0186 | WH BL | 2700 3000 | 10° | 10 | PH (Phase) DA (DALI) |
| | | | 15° | | |
| | | | 24° | | |
| | | | 36° | | |
| | | | 50° | | |

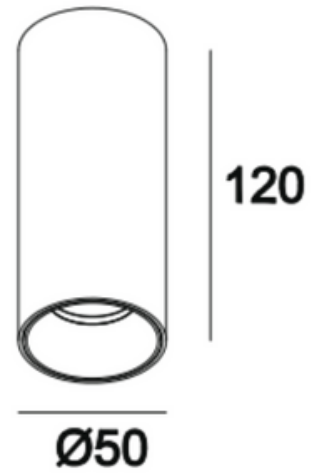

performance specifications

| | |
|---------------|---------------------|
| LED Power | 10w |
| LED type | COB |
| Luminous Flux | 960lm |
| CCT | 2700k, 3000k |
| Beam Angle | 10°/15°/24°/36°/50° |
| Input Voltage | AC230v-50Hz |
| CRI | Ra≥92 |
| Lifetime | 40,000hrs |
| Warranty | 3yrs |
| IP Rating | IP20 |

design specifications

| | |
|-------------|-----------------|
| Material | Aluminium Alloy |
| Trim Colour | White/Black |
| Cutout | n/a |
| Diameter | Ø50mm |
| Height | 120mm |

